


# MINIATURE VALVES

## VSp

■高圧用 (260kgf/cm<sup>2</sup>・26MPa)

### NEEDLE STOP VALVE

ネジ込み型




#### ■仕様

SIZE	MAX Cv値	TEMPERATURE
1/8B	0.36	-20°C
1/4B	0.48	
3/8B	0.66	150°C
1/2B	0.82	
3/4B	1.82	


#### ■材質

NAME	MATERIAL
BODY	SUS316
STEM	SUS316 ステライトモリ
PACKING	PTFE
HANDLE	ADC12

#### ■圧力-温度基準

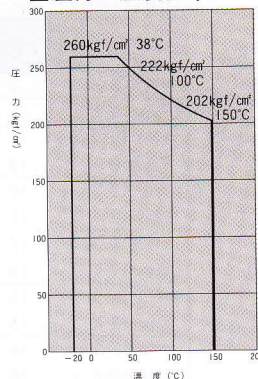

#### ■Cv値曲線

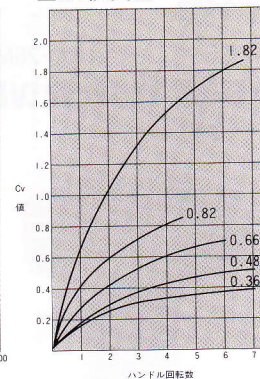

#### ■寸法表

(Unit : mm)



PART. No.	SIZE	P PT or NPT	d	L	H	l	h	W	B	b	重量 (g)
VSp-101F	1/8B	1/8	5	50	73	7	7	58	22	18.5	300
VSp-202F	1/4B	1/4	5	50	73	7	7	58	22	18.5	290
VSp-303F	3/8B	3/8	6	56	80	6	7	68	28	22.5	480
VSp-404F	1/2B	1/2	8	62	86	6.5	7	68	32	22.5	575
VSp-606F	3/4B	3/4	10	70	107	10	7	78	38	25.5	900

## VWp

■高圧用 (260kgf/cm<sup>2</sup>・26MPa)

### NEEDLE STOP VALVE

ソケットウェルド型

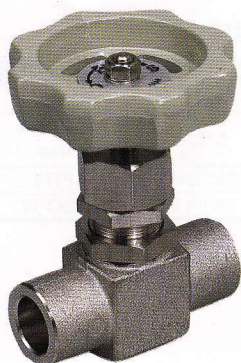


#### ■仕様

SIZE	MAX Cv値	TEMPERATURE
1/8B	0.36	-20°C
1/4B	0.48	
3/8B	0.66	150°C
1/2B	0.82	
3/4B	1.82	


#### ■材質

NAME	MATERIAL
BODY	SUS316
STEM	SUS316 ステライトモリ
PACKING	PTFE
HANDLE	ADC12

#### ■圧力-温度基準

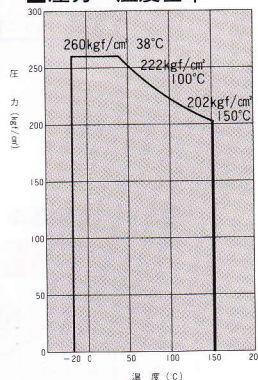

#### ■Cv値曲線

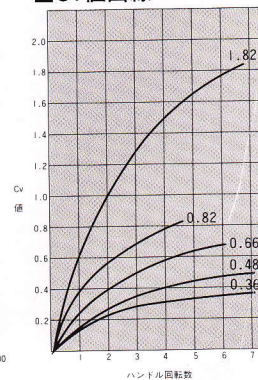

#### ■寸法表

(Unit : mm)

PART No.	SIZE	d <sub>1</sub> S-W	d	L	s	H	l	h	W	B	b	重量 (g)
VWp-101S	1/8B	11.0	5	58	10	73	7	7	58	22	18.5	320
VWp-202S	1/4B	14.3	5	58	10	73	7	7	58	22	18.5	310
VWp-303S	3/8B	17.8	6	63	13	80	6	7	68	28	22.5	505
VWp-404S	1/2B	22.2	8	73	13	86	6.5	7	68	32	22.5	655
VWp-606S	3/4B	27.7	10	70	16	107	10	7	78	38	25.5	900